

AIR-LOC® PRESSURE TESTING HOSES



Triple Hose

The 3/8" diameter hose assembly is used to connect the Air-Loc® Panel to the front plug. Triple hose is color-coded, making connections easy to understand. Hose features locking quick disconnects for convenience and safety. Hose also includes strain relief to protect hose and connections from damage.

Triple Hose available with 3/4 blue test pressure hose for quick exhausting.

6.7 M Interconnect Hose (#43338 – 4 lbs)

The interconnect hose is used to attach the front and back air test plugs when conducting a leak location test. This hose includes a cable for attaching to the pipe plugs to take strain off the hose during the leak location process.

253388 Air-Loc® Triple Hose Reel

The triple hose reel includes a 121 M triple hose and mounting plate for the control panel. Control panel is sold separately.

AIR-LOC PRESSURE TESTING HOSES




Triple Hose



6.7 M Interconnect Hose

PART NUMBER	DESCRIPTION
35268	7.5 M (25') Triple Hose
257038	15 M (50') Triple Hose
257188	121 M (400') Triple Hose
257108	7.5 M (25') Hi-Flow Triple Hose
257098	15 M (50') Hi-Flow Triple Hose

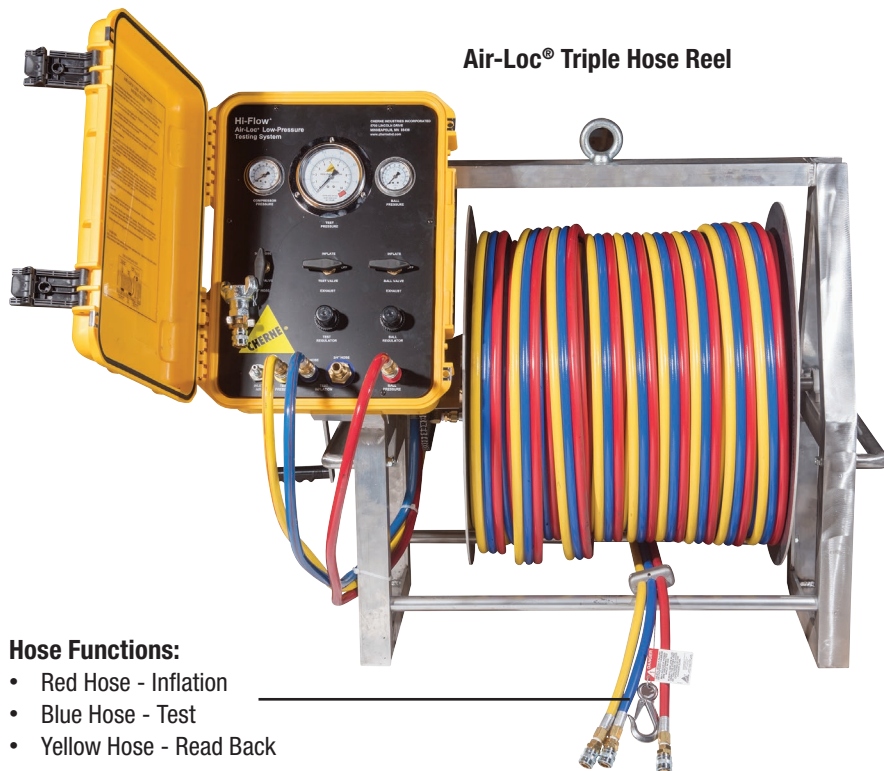

Air-Loc® Triple Hose Reel

Hose Functions:

- Red Hose - Inflation
- Blue Hose - Test
- Yellow Hose - Read Back